


## THE 30-60 *Oil Pull* TRACTOR

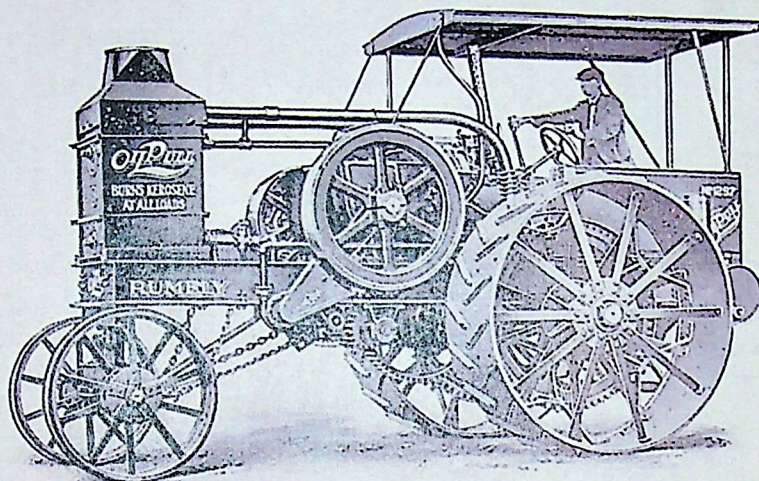

### SPECIFICATIONS OF 30-60 *Oil Pull*

#### HORSEPOWER

Tractive.....	30
Brake.....	60
R. p. m.....	375

#### CYLINDERS

Number.....	2
Diameter.....	10 in.
Stroke.....	12 in.

#### FRAME

Size of I-Beam.....	12 in.
Weight in lbs. per foot...	31½ in.

#### WHEELS

	Tire	Height
Front.....	16 in.	44 in.
Extension (extra)....	6 in.	44 in.
Rear.....	30 in.	80 in.
Extension Rim.....	10 in.	80 in.

#### SPOKES

Inches Wide.....	2¾
Inches Thick.....	¾

#### DIAMETER OF SHAFTS

Differential.....	4 7/8 in.
Reverse.....	4 3/8 in.
Idler.....	3 7/8 in.
Crank Shaft.....	4 7/8 in.

#### DIAMETER OF AXLES

Front Axle.....	3 1/4 in.
Rear Axle.....	5 1/8 in.

#### GEARING

	Face	No. of Teeth
Master Gear.....	6 in.	71
Master Pinion.....	6 1/4 in.	11
Second Motion Gear....	4 in.	66
Reversing Gear.....	5 in.	25
Small Idler Gear.....	5 in.	12
Large Idler Gear.....	5 in.	17
Differential.....	5 in.	63

#### FLY WHEEL

Diameter.....	48 in.
Weight.....	1300 lb

#### BAND WHEEL

Face.....	11 in.
Diameter.....	36 in.

#### SHIPPING WEIGHT IN POUNDS

26,500

#### GENERAL DIMENSIONS

Extreme Length.....	19 ft. 0 in.
Extreme Width.....	9 ft. 8 in.
Extreme Height.....	11 ft. 0 in.