


## THE 15-30 *Oil Pull* TRACTOR

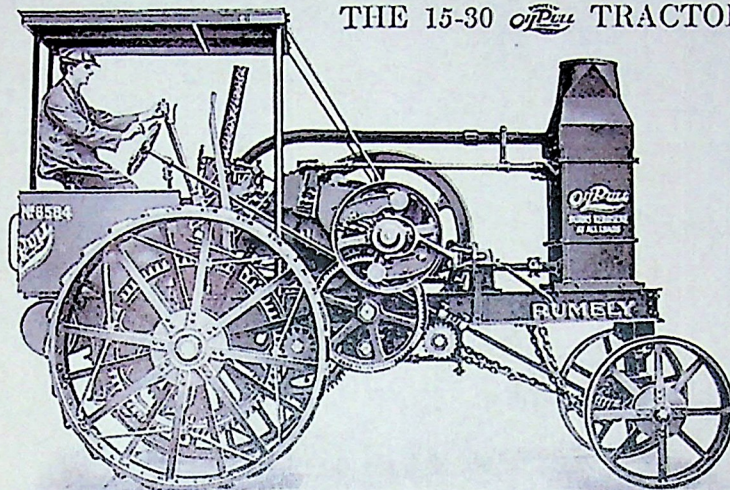

### SPECIFICATIONS OF 15-30 *Oil Pull*

<b>HORSEPOWER</b>		<b>SPOKES</b>		
Tractive .....	15	Inches Wide .....	2	
Brake .....	30	Inches Thick .....	1/2	
R. p. m. ....	375	<b>DIAMETER OF AXLES</b>		
<b>CYLINDERS</b>		Front Axle .....	2 1/2 in.	
Number .....	1	Rear Axle .....	4 1/8 in.	
Diameter .....	10 in.	<b>DIAMETER OF SHAFTS</b>		
Stroke .....	12 in.	Differential .....	3 1/16 in.	
<b>FRAME</b>		Reverse .....	3 1/2 in.	
Size of I-Beam .....	9 in.	Idler .....	2 7/8 in.	
Weight in lbs. per foot .....	21	Crank Shaft .....	4 1/8 in.	
<b>WHEELS</b>		<b>FLY WHEEL</b>		
	Tire	Height		
Front .....	12 in.	38 in.	Diameter .....	
Extensions (extra) .....	6 in.	38 in.	55 1/4 in.	
Rear .....	24 in.	70 in.	Weight .....	
Extension Rims .....	10 in.	70 in.	1000 lb	
<b>GEARING</b>		<b>BAND WHEEL</b>		
	Face	No. of		
		Teeth	Face .....	
Master Gear .....	4 in.	73	9 1/2 in.	
Master Pinion .....	4 1/2 in.	14	Diameter .....	
Second Motion Gear .....	3 1/2 in.	90	30 in.	
Reversing Gear .....	3 in.	22	<b>SHIPPING WEIGHT IN</b>	
Small Idler Gear .....	3 in.	12	<b>POUNDS.</b> .....	
Large Idler Gear .....	3 in.	18	16,500	
Differential .....	3 in.	57	<b>GENERAL DIMENSIONS</b>	
Large Differential .....	3 in.	62	Extreme Length .....	16 ft. 0 in.
High Speed Gear .....	3 in.	27	Extreme Width .....	7 ft. 10 in.
			Extreme Height .....	10 ft. 3 1/2 in.